


ROCKWELL®

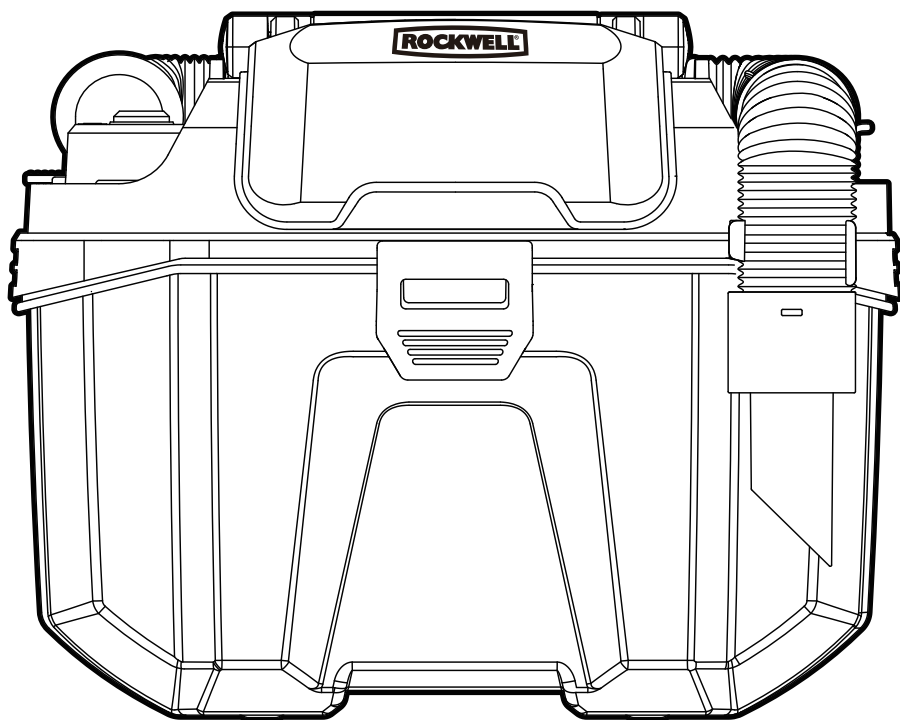


RD2398.9










18V VACUUM CLEANER SKIN

EN

RD2398.9

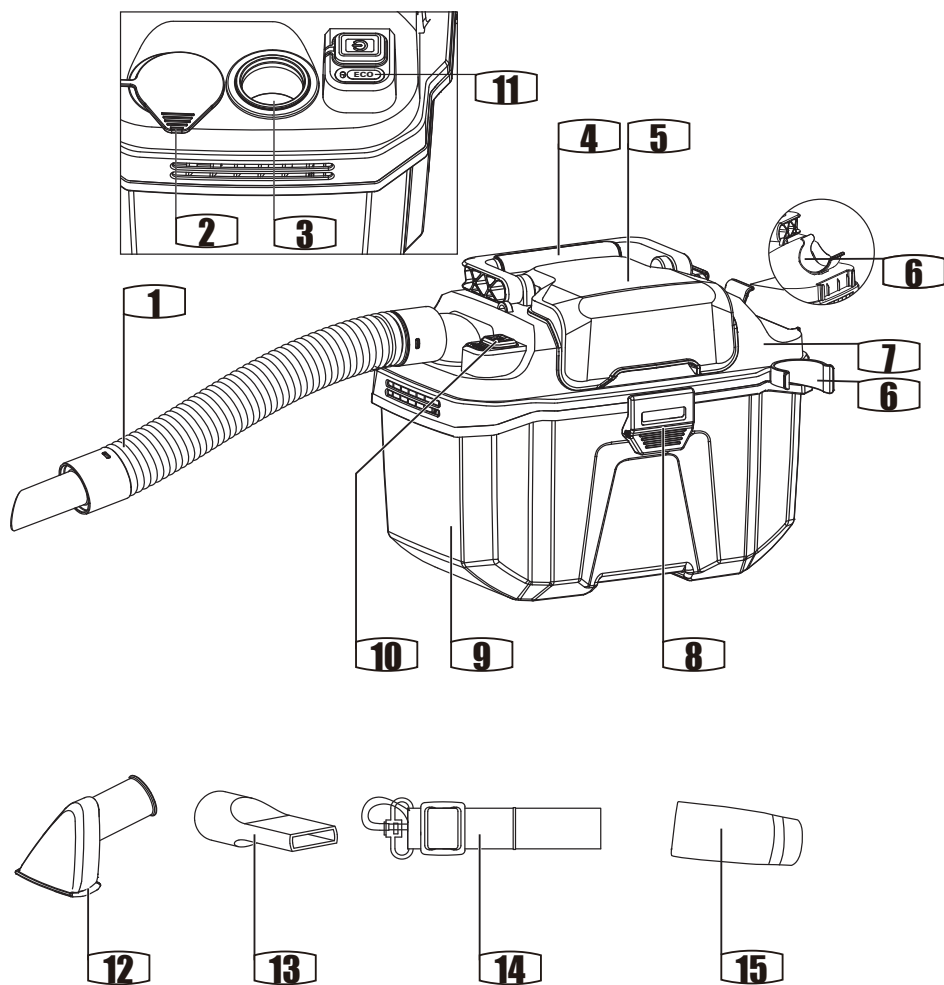

RD2398.9



COMPONENT LIST

1	Hose with tapered nozzle	9	Collection container
2	Blower outlet	10	On/off switch
3	Suction inlet	11	Eco button
4	Handle	12	Wide nozzle
5	Battery cover	13	Crevice nozzle
6	Hose hook	14	Shoulder strap
7	Lid	15	Tool dust port adapter
8	Tank latch		

Not all the accessories illustrated or described are included in standard delivery.


ACCESSORIES

Shoulder strap	1
2.0m Telescopic suction hose	1
Washable HEPA filter	1
Crevice tool	1
Wide nozzle	1
Tool dust port adapter	1

We recommend that you purchase your accessories from the same store that sold you the tool. Refer to the accessory packaging for further details. Store personnel can assist you and offer advice.

PRODUCT SAFETY

GENERAL SAFETY WARNINGS

 **WARNING! Read all safety warnings and all instructions.** Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Children should be supervised to ensure that they do not play with the appliance.

TECHNICAL DATA

Type RD2398.9 (23-designation of machinery, representative of vacuum cleaner)

Voltage	18V==
Vacuity	10 Kpa
Container size	10L
Dust collect capacity	8L
Water collect capacity	3L
Maximum air flow rate	15 L/S
Tool weight	2.97 kg

SYMBOLS



Warning!



Read operator's manual



RCM marking

ABN: Australian Business Number. By this number, business information such as entity type, status, business location etc. can be found at website <http://abr.business.gov.au>.

ABN of Positec Australia Pty Ltd is 14 101 682 357

OPERATION



NOTE: Before using the tool, read the instruction book carefully.

INTENDED USE:

This machine can be used as both vacuum cleaner and blower. With the strong suction power, it can easily pick up wet and dry messes.

1. ASSEMBLING THE SHOULDER STRAP (SEE FIG. A)

Secure the shoulder strap hooks of the shoulder strap to the eyelets on the both sides of the battery cover. It is recommended to always attach the shoulder strap when using the tool.

2. ON / OFF SWITCH (SEE FIG. B)

Press the on-off switch to start operation.

Power Selection

When the switch is pressed for the first time, the machine starts and works at high speed. Press the ECO button for a low speed. Press it again, the cleaner will switch to high speed. To stop, press the ON/ OFF switch again.

NOTE: When working under high speed, the light is not on. When working under ECO mode, the light shows green.

WARNING: Please keep the air intake unobstructed, otherwise it may cause motor overheating and may damage the machine.

3. USING AS A VACUUM CLEANER/BLOWER

This machine has the suction inlet (Position 1) and blower outlet (Position 2) separately. Connect the hose to the proper port depending on your work. (See Fig. C)

a) Function as a vacuum (See Fig. C, D)

Insert the hose into the suction inlet (Position 1).

Nozzle assembly

When using as a vacuum, you can choose wide nozzle and crevice nozzle depending on different working needs.

Dry Vacuuming

Vacuum items only small enough to fit through the hose. When vacuuming, make sure that the filter stays in place.

The performance of the vacuum will decrease with a

full collection container. When emptying the collection container, check to see if the filter needs cleaning.

ATTENTION:

1. Do not suck sharp objects such as nails into the vacuum.
2. Do not suck objects with high temperature such as carbon ash. Please let it cool down first.
3. Clean the HEPA filter regularly. Wet Vacuuming This machine is equipped with doubleprobe detector, which is designed to shut off the suction when the collection container reaches full wet capacity. When the collection container is full, empty the collection container as shown in maintenance.

ATTENTION:

1. Put the machine on the flat ground.
2. Make sure the filter is completely dry after picking up water or wet debris.

b) Function as a blower (See Fig. E)

Insert the hose into the blower outlet (Position 2). Open the rubber cover on position 2 to start using the air blowing function and put it back to its original place after completion.

WARNING: Never point the nozzle at anyone in the vicinity.

4. ATTACHING THE ADAPTER (SEE FIG. F)

Your vacuum is equipped with a adapter, which is designed for connecting the specified tools. Insert the adapter into the rear dust extraction outlet of hose and ensure it is tightened securely. Then connect the adapter to the specified tools.

MAINTENANCE

Remove the battery pack from the tool before carrying out any adjustment, servicing or maintenance.


Emptying the collection container

Dry Waste:

Remove the battery pack. Unhook the two locking latches and remove the lid. Inspect the filter, lightly shake any dust or dirt from it, or replace if necessary. Empty the collection container, or wash out if necessary. Before replacing the lid, make sure all pieces are completely dry. Reinstall lid and lock securely.

Liquid Waste:

Remove the battery pack. Unhook the two locking latches and remove the lid. Empty the collection container, or wash out if necessary. Before reinstalling the lid, make sure all pieces are completely dry. Reinstall lid and lock securely.


 **WARNING:** Do not use the vacuum without installing the filter. If suction has decreased, empty the tank of debris or clean the filter.

Filter Cleaning (See Fig. G1, G2)


Remove the battery pack. Unlock the two locking latches and remove the lid.

To Clean/Replace: Remove the filter by loosening the screws on top of the tank lid. Lightly shake any dust or dirt off the filter or replace it if needed. Reinstall the filter by aligning it back on the lid and tightening the screws.

NOTE: Make sure the filter is seated properly.

 **WARNING:** Never wash the filter in a washing machine.

NOTE: Clean the filter regularly to ensure optimal suction and performance.

 **WARNING:** Before reinstalling, make sure the filter is completely dry.

STORAGE

Clean all foreign material from the vacuum cleaner. Clean the outside of the collection container with warm water and mild soap. Empty and clean the collection container, hose, nozzles, and attachments with warm water and mild soap, and allow to completely dry before storage. The collection container should be disinfected if needed before prolonged storage. Store indoors where is dry and inaccessible to children. Keep away from corrosive agents such as garden chemicals and de-icing salts. (See Fig. H)

TROUBLESHOOTING

Symptom	Possible Causes	Possible Solution
Vacuum does not turn on	No battery	Install battery
	Battery is low	Charge the battery
	Filter blocked	Clean or replace the filter
	Tank lid is not firmly latched	Secure the tank lid
	The liquid waste reaches 3L.	Empty the collection container
	Hose blocked	Clean blockage



POSITEC AUSTRALIA PTY LTD
ABN 14 101 682 357

MADE IN CHINA