

Makita

255mm (10") Compound Saw

240V

Makita
PART NO. 1128520

LS1040



255mm (10") Compound Saw

The 255mm (10") compound saw (LS1040) features a 1,650W motor with a no-load speed of 4,600rpm. The saw can bevel 45-degrees left, with a mitre range of 45-degrees left and right.

The blade case of the LS1040 is connected to the base by a rigid arm meaning the saw can cut more accurately. The saw also features a movable sub fence that allows material to be better supported across multiple cutting positions.

The LS1040 comes standard with a dust bag that can be mounted at the rear of the blade case to capture debris, or in place of the dust bag an optional dust extractor can be connected. The saw is also fitted with an electric brake to rapidly slow wheel rotation when the switch is released.



Product Overview

240V

Safety Switch

Dust Bag


Bevel Lock Lever

Movable Sub Fence

Powerful 1,650W Motor

Electric Brake

Mitre Adjustment and Lock

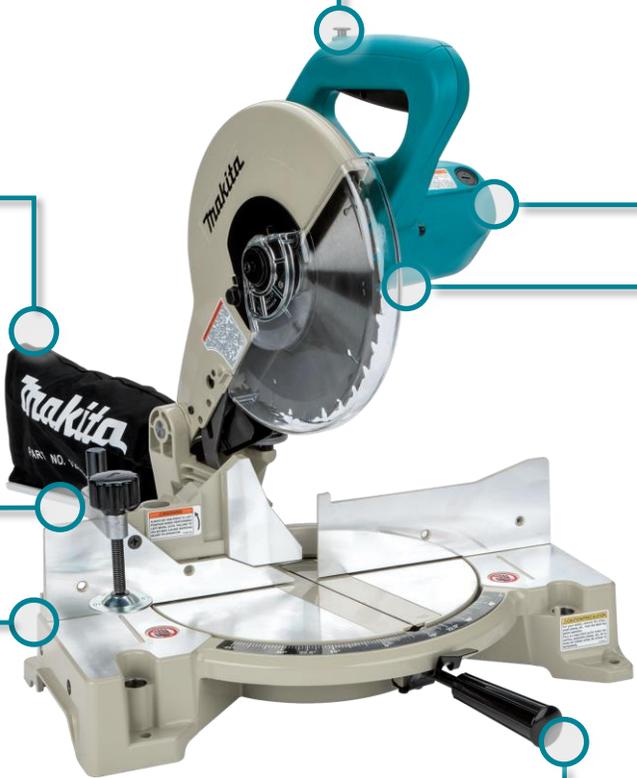

Product Specifications

240V



Cutting capacities at 0°	90.5 x 95mm
Cutting capacities at 45° mitre	90.5 x 67mm
Bevel capacity	45° left
Mitre capacity	45° left / 45° right
Blade diameter	255mm (10")
Bore diameter	25.4mm
Continuous Rating Input	1,650W
No load speed	4,600rpm
Overall length	476mm
Net Weight	11.0kg
Power Supply Cord	2.5m

- **Safety Switch** – The safety switch on top of the handle must be pressed and held to unlock the trigger and operate the saw.
- **Dust Bag** – The dust bag that comes standard can easily be removed and emptied, the dust bag can also be substituted for optional dust extraction.
- **Bevel Lock Lever** – The lock lever at the back can be loosened to allow the rear arm to bevel left up to 45-degrees.
- **Movable Sub Fence** – The sub-fence can be moved to the left or right to better support material across multiple cutting positions
- **Powerful 1,650W Motor** – 1,650W continuous rating input offers 4,600rpm no-load speed for high performance cutting.
- **Electric Brake** – When the switch is released the electric brake will engage to rapidly slow the blade.
- **Mitre Adjustment and Lock** – The table can mitre up to 45-degrees to the left and right using the front lever with positive stops at 0°, 15°, 22.5°, 30°, 45° (left and right).

Performance



High power 1,650W motor offers 4,600rpm no-load speed.

Adaptability



Bevel 45-degrees left, mitre 45-degrees left and right.

Capacity



Movable sub-fence to support material across multiple cutting positions

Safety



Safety switch to prevent accidental operation, electric brake to rapidly slow wheel rotation.

	LS1040	LS1018L	LS1019
			
Cutting capacities at 0°	90.5 x 95mm	91 x 310mm	Max. width: 68 x 310mm Max. height: 91 x 279mm
Cutting capacities at 45° mitre	90.5 x 67mm	91 x 220mm	Max. width: 68 x 218mm Max. height: 91 x 197mm
Bevel capacity	45° left	45° left / 45° right	48° left - 48° right
Mitre capacity	45° left - 45° right	47° left / 60° right	60° left - 60° right
Blade diameter	255mm (10")	260mm (10-1/4")	260mm (10-1/4")
Bore diameter	25.4mm	25.4mm	25.4mm
Continuous Rating Input	1,650W	1,430W	1,510W
No load speed	4,600rpm	4,300rpm	3,200rpm
Overall length	476mm	536mm	805mm
Net weight	11.0kg	19.8kg	26.3kg
Power Supply Cord	2.5m	2.5m	2.0m

Standard Accessories		
	B-30891	255mm (10") Saw Blade
	762001-3	Triangular Rule
	782212-4	Socket Wrench 13
	122852-0	Dust Bag Assembly
	193471-9	Sub-Plate Assembly
	192625-5	Vice Assembly
	322312-4	2x Holder Arms

Optional Accessories			
	Click to View Blades	Efficut Saw Blades	
	Click to View Blades	BlueMak Saw Blade	
	Click to View Blades	Knot & Nail Saw Blade	
	Click to View Blades	Silencer Saw Blade	
	Click to View Blades	Aluminium Saw Blade	