Nero® Collection



We take the worry out of protecting what's valuable to you. Lockwood: no worries*





www.lockweb.com.au

NERO® COLLECTION



Master the Mood with Lockwood

The Lockwood Nero Collection provides a sensuous quality that complements contemporary décor; adding a defining design element to any space.

Contents











Entrance

Handles

page 4

Velocity® Large Rose

Element Lever

page 7

Velocity® Small Rose

Leversets

page 10

Velocity® Small Rose

Escutcheons

page 14

Cavity Sliding

Door Lock

page 16





page 18

Flush Pull

FP2



724 Series

Slide Arm Door Closer

page 20



Nexion® Mechanical

Entrance Lockset

page 22



Paradigm® 005

Double Cylinder Deadbolt

page 26



Symmetry®

Key in Lever

page 30



001 Double

Cylinder Deadlatch

page 33



Symmetry®

Double Cylinder

page 36



$100^{\tiny{\tiny (\!R\!)}}$

Nightlatch

page 38

Entrance Handles



Lockwood Entrance Handles are constructed using the finest materials to incorporate the maximum standards in style, durability, finish and design.

Style and Variety

Combining fit for purpose with the epitome of style, the Lockwood Entrance Handles offers a high quality solution to the requirements of both residential and commercial markets.

Packaging For Various Doors

Comes supplied with spigots to suit 10 – 12mm thick glass doors as well as aluminium and timber doors up to 50mm thick.

Application

Suitable for use on timber or aluminium frame as well as glass doors; making them the ideal choice for commercial, industrial and residential applications.

Multi Fix - timber, aluminium or glass doors

Product Details


Materials

Stainless Steel Construction: Constructed of 304 grade stainless steel, suitable for use in external environments

Standards and Compliance




Disabled Access - AS1428.1




Entrance Handles

141 Series						
Dimensions						
	Α	B1	B2	C	D	E
141x300MBK	300mm	22mm	40mm	45mm	450mm	25mm
141x600MBK	600mm	22mm	40mm	45mm	750mm	25mm
Fixing						
Timber	2 x 80mm M8 Bolts - 8.5mm hole					
Glass	2 x 40mm M8 Bolts - 13mm hole					
	Disabled A	Accessible A	AS1428.1			






142						
Dimensions						
	Α	В	C	D	E	
142x300MBK	300mm	32mm	45mm	450mm	25mm	
142x450MBK	450mm	32mm	45mm	600mm	25mm	
Fixing						
Timber	2 x 80mm M8 Bolts - 8.5mm hole					
Glass	2 x 40mm M8 Bolts - 13mm hole					
	Disabled Accessible AS1428.1					





143						
Dimensions						
	Α	B1	B2	C	D	
143x450MBK	450mm	30mm	15mm	35mm	465mm	
143x600MBK	600mm	30mm	15mm	35mm	615mm	
Fixing						
Timber	2 x 62mm M6 Bolts - 8.5mm hole					
Glass	2 x 32mm M6 Bolts - 13mm hole					
	Disabled A	ccessible AS	1428.1			







143X600MBK

Entrance Handles


145					
Dimensions					
	Α	В	C	D	E
145x225MBK	225mm	25mm	45mm	300mm	19mm
Fixing					
Timber	2 x 70mm M8 Bolts - 8.5mm hole				
Glass	2 x 30mm M8 Bolts - 13mm hole				
	Disabled Accessible AS1428.1				



146						
Dimensions						
	Α	В	C	D	E	F
146x450MBK	450mm	25mm	60mm	475mm	60mm	25mm
146x600MBK	600mm	25mm	60mm	625mm	60mm	25mm
Fixing						
Timber	2 x 80mm M8 Bolts - 8.5mm hole					
Glass	2 x 40mm M8 Bolts - 13mm hole					
E	Disabled A	Accessible	AS1428.1			





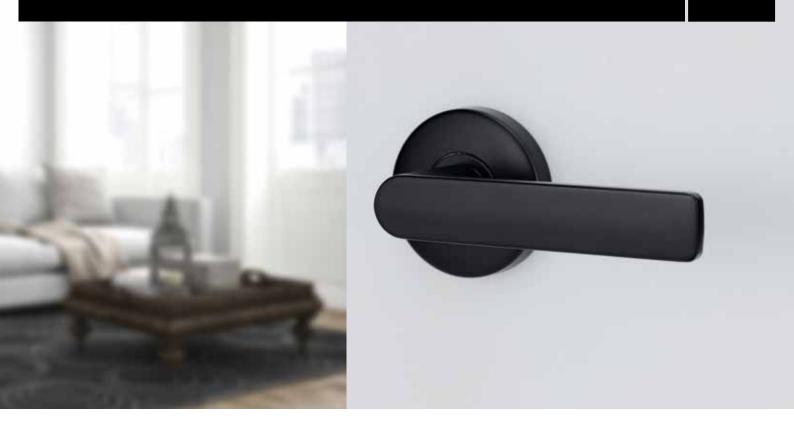

The Velocity Series is a stylish range of door furniture suitable for use in residential dwellings.

Designed to suit common door preparations in the Australian market, Velocity is ideal for both new and retrofit applications.

Retrofitable

Fits majority of doors with 54mm hole.



Align







Features and Specifications

- All fixings are concealed beneath a removable rose trim providing a crisp and clean presentation desired by the discerning home owner
- Simple twist and tighten fixing method with pre-assembled lever set allows for super easy and fast installation
- The rose fits 50mm or 54mm diameter holes making is suitable for retrofit and common door preparations
- Designed in Australia for the specific needs of the Australian market

Prod	uct [)etails

110ddcc Dctail	
Rose Dimensions	63mm by 12.5mm.
Materials	Solid zinc die-cast with steel rose trims
Latches	Passage sets are available with a 60mm backset tubular latch. Privacy sets are supplied with a 60mm backset privacy latch which includes an activating pin for the inside of the door and an external emergency release function. The latch is automatically released when the internal handle is operated and is easily adapted for both open in and open out applications. All latches are supplied with industry standard "D" strikes.
Door Thickness	32mm to 45mm hinged doors
Finishes	Matt Black (MBK)

Standards and Compliance


D5	Tested to AS4145.2 2008 for Durability passing D5 - 100,000 cycles.
	Tested to AS4145.2 2008 for Neutral Salt Spray, passing C6 - 168 hours.


Not suited to coastal applications



Element[™]– Lever 3

Length122mmProjection54.5mmFinger Clearance47.5mm





Passage Leverset

Part Number VEL1/L3MBK

Dummy Lever

Part Number VEL3/L3MBK



Privacy Leverset

Part Number VEL2/L3MBK



Passage Leverset

Part Number VEL1/37MBKDP

Disabled Accessible AS1428.1

*Available in Display Pack Only





Part Number VEL2/37MBKDP

Disabled Accessible

AS1428.1

*Available in Display Pack Only



Square Rose Passage Trim

Part Number VES1-TRIMMBK

* Pack of 2



Square Rose Privacy Trim

Part Number

VES2-TRIMMBK

* Pack of 2








The Velocity Small Series is a stylish range of door furniture suitable for both residential and semi-commercial applications. Designed primarily for new installation on timber doors, the range incorporates functionality for use with Mortice Locks in addition to Passage, Privacy and Dummy Levers.

InstallationSuits door thickness range of 32mm to 45mm.











Features and Specifications

- All fixings are concealed beneath a removable rose trim providing an aesthetically appealing installation
- Simple twist and tighten fixing method with pre-assembled lever set allows for super easy and fast installation
- Choose from two lever designs, the ever popular Element L3 lever and the AS1428.1 compliant Dianella L8 lever
- Accessories include AS1428.1 compliant turn, standard turn and privacy indicating emergency turns
- The 55mm rose suits up to 45mm door thickness commonly used with mortice locks or latches
- Designed in Australia for the specific needs of the Australian market

Product Details				
Rose Dimensions	55mm by 12.5mm - Round Rose 58mm by 12.5mm - Square Rose			
Materials	Solid zinc die-cast lever with steel rose trims			
Latches	Passage sets are available with a 60mm backset tubular latch. Privacy sets are supplied with a 60mm backset privacy latch which includes a locking pin for the inside of the door and an external emergency release function. The latch is automatically released when the internal handle is operated and is easily adapted for both open in and open out applications. All latches are supplied with industry standard "D" and "T" strikes.			
Door Thickness	32mm to 45mm hinged doors			
Finishes	Matt Black (MBK)			

Standards and Compliance



Successfully tested up to 2 hours on fire door assemblies in accordance with the Australian Standard AS1905.1 2005 - Part 1: Fire Resistant Doorsets when used with Lockwood Synergy or Selector mortice locks

D8

Tested to AS4145.2 2008 for Durability passing D8 - 500,000 cycles



Tested to AS4145.2 2008 for Neutral Salt Spray, passing C6 - 168 hours





AS1428.1 Compliance.

The range includes AS1428.1 compliant levers and turns

Element™ - Lever 3

LICITICITE - LCVC	
Length	122mm
Projection	54.5mm
Finger Clearance	47.5mm





Mortice Lock Leverset

Part Number VSR0/L3MBK

Passage Leverset

Part Number VSR1/L3MBK

Dummy Lever

Part Number VSR3/L3MBK




Privacy Leverset

Part Number VSR2/L3MBK



Dianella™ - Lever 8 Length 121mm Projection 51mm Finger Clearance 38mm Disabled Accessible AS1428.1



Mortice Lock	Leverset
Part Number	VSR0/L8MBK
Passage Lever	·set

Part Number

VSR1/L8MBK



Privacy Levers	et	
Part Number	VSR2/L8MBK	




Square Rose Passage Trim

Part Number

VSS1-TRIMMBK

* Pack of 2



Square Rose Privacy Trim

Part Number


VSS2-TRIMMBK

* Pack of 2




Euro Cylinder Escutcheon Part Number VSR5/MBK Height 55mm Depth 12.5mm Supplied with

2x Wood Screws






Oval Cylinder Escutcheon	
Part Number	VSR6/MBK
Height	55mm
Depth	12.5mm
Supplied with 2x Wood Screws	






Standard Turnknob	
Part Number	VSR7/MBK
Height	55mm
Depth	12.5mm
Handing	Not required
Supplied with 2x Wood Screws 1x Short Tail Bar 1x Medium Tail Bar 1x Tail Bar Spring 1x Instructions (1220-321)	





Privacy Indicating Emergency Turn	
Part Number	VSR8/MBK
Height	55mm
Depth	12.5mm
Committee describe	

ieignt	55mm
Depth	12.5mm
Supplied with x Wood Screws x Emergency Tail Bar x Instructions (1220-321)	





Disabled Accessible Turnknob	
Part Number	VSR9/MBK
Height	55mm
Depth	12.5mm
Turn Snib Length	52mm
Handing	Site handable

52.0



Supplied with

2x Wood Screws

1x Tail Bar (short)

1x Tail Bar (medium)

1x Tail Bar Spring

1x Instructions (1220-321)

Square Rose Escutcheon Trim		

* Pack of 2



Cavity Sliding Door Lock





The Lockwood sliding door lock range is possibly the most innovative and aesthetically pleasing lock for a cavity sliding door in Australia. Combining elegance and ease of use, the Lockwood Cavity Sliding Door Lock range is ideal for any home décor and security solution.

Available in entrance, passage and privacy models, it offers the perfect solution for residential bathroom sliding doors.

Features and Specifications

 Fitted flush against the panel of the sliding door for full recess into the door cavity

Retractable door pull

Designed after extensive research, the sliding cavity door lock features an innovative retractable door pull which combines style with functionality.

Product Details	
Cross Drill	25mm
Door Thickness	32* to 40mm for timber doors *Requires spacer ring (included)
Finishes	Matt Black (MBK)
Latch Backset	60mm
Prep Hole	54mm
Strike	Box strike or pip strike (passage)
Materials	Furniture plate: Zinc Alloy Bolt: Nickel Plated Zinc (12.4mm projection) Bolt Beak: Stainless Steel Front End Plate: Stainless Steel Retractable Door Pull: Zinc Plated Strike Plate: Stainless Steel Strike Box: Zinc Plated

Cavity Sliding Door Lock

7400 Privacy Set


Part Number	Finish
7400MBKDP	Matt Black

Outside

Emergency release button opened by coin or screwdriver

Inside

Locked or unlocked by turn-plate





Exterior Interior

7444 Entrance Set


Part Number	Finish
7444MBKDP	Matt Black

Outside

Locked or unlocked by key

Inside

Locked or unlocked by turn-plate





Exterior Interior

7/150 Dassage Set


Part Number	Finish
7450MBKDP	Matt Black

Outside

Free to slide door at all times

Inside

Free to slide door at all times





Exterior

Interior

FP2 Flush Pull



The Lockwood Nero® Flush Pull offers multiple solutions for flush mount door furniture.

Application

Suited to numerous applications which require the door furniture to be flush with the surface of the door.

Zinc Materials Stainless Steel

These products have been successfully tested in accordance with AS 2331-3.1: 2001. Neutral Salt Spray Test (NSS TEST). Passing C6 Corrosion Resistance - 168 hours


C6

FP2 Flush Pull



Features and Specifications

- Stainless steel flush pull
- Trade packed, complete with fixing screws





724 Series Slide Arm Door Closer




The Lockwood Rack & Pinion Slide Arm Series provides for a cleaner, more aesthetic appearance on the door whilst utilizing the same robust features and benefits of Rack and Pinion functionality.

Specifications	
Power	EN adjustable 2 to 4
Back check (BC)	Adjustable
Hold Open	Adjustable. Hold-open can be set at any angle up to 150° of opening
Handing	Non-handed. Suitable for left or right hand doors
Cover	Clip-on
Materials	Extruded aluminium body manufactured
Materials	from high-performance silicon alloy
Mechanism	
	from high-performance silicon alloy
Mechanism	from high-performance silicon alloy Rack and pinion design

Standards and Compliance

Tested on fire door assemblies up to 4 hours in accordance with Australian Standard AS1905.1-1997, Part 1: Fire Resistant Doorsets The Lockwood 724SR series closer has been successfully tested upto four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS1905.1:2005, Part: Fire Resistant Door sets.






724 Series Slide Arm Door Closer

724SR Slide Arm Pull Side

Part Number

724SRBLK

Closer installed on pull side of door. This mounting position permits opening of 130°.

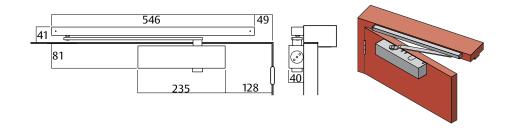



7724SR Slide Arm Push Side

Part Number

724SRBLK

Closer installed on push side of door. This mounting position permits opening of 115°.

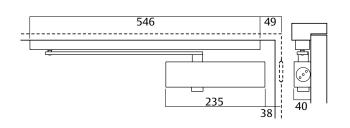





7724SR Slide Arm Over Door Mounting Push Side

Part Number

724SRBLK

Closer installed on push side of door and top rail where conditions do not allow parallel mounting. This mounting position permits opening of 115°.





The Nexion Entrance Lockset represents the next generation in home security.

Designed and manufactured to the highest standards of quality, the Lockwood Nexion has set the benchmark for safety, security and style. The Nexion offers the ultimate protection for your home and family.

Features and Specifications

- Three mode security: Secure, Safety and Passage mode provides excellent security without compromising convenience
- LockAlert® indicator shows lock status at a glance
- SafetyRelease™ automatically unlocks the inside handle upon entry to minimise the risk of being locked in
- · High security latch
- Box strike with concealed crossgrain door frame strengthening screw
- Can be keyed alike to other Lockwood door locks as well as builder's key systems

Product Details	
Backset	60mm as supplied 70mm optional (order part 530-222SC)
Case	High purity zinc alloy
Door Thickness	35 to 45mm
Finishes	Matt Black (MBK)
Handles	Element Lever 3
Latch	13mm projection brass bolt
Strike	Box strike with concealed crossgrain door frame strengthening screw
Templates	Installation template included
Handing	Adjustable handing by set screw
Cylinder	Internal and external 5 pin tumbler mechanism with 6 pin capability Brass cylinders and brass barrels

fire resistance level of up to 1



hour on fire door assemblies in accordance with Australian Standard AS1905.1:2005 Fire Resistant Doorsets. The fire rated option is achieved with a standard Nexion Vision Entrance Lockset and the optional fire rated kit (order NXVFRKIT).

The locksets can be optioned to suit fire door sets with a

(Security) Australian Lock S_L7 Standard (AS4145.2.2008)

(Durability) Australian Lock **D8** Standard (AS4145.2.2008)

(Corrosion) Australian Lock Standard (AS4145.2.2008)

CE Approved



C-tick certified




Keying


- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB2015P

Restricted Special Keying
Lockwood locks can be keyed to a
number of controlled and/or specially
keyed systems. These range from legally
protected keys to protect against
unauthorised duplication, which can
also include specially designed key
systems such as master key systems,
which allow for different levels of
mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Latch Dimensions







Kinetic Defence® Bump and pick resistant.



Deadlatch Bolt 13mm projection brass bolt.



SafetyRelease™ Minimises the risk of being locked in.



2 Keys IncludedCan be keyed alike to other Lockwood door locks.



LockAlert®

Interior Indicator shows lock status at a glance.



Quick Installation

Suitable for door thicknesses between 35–45mm.



Safety Mode

Securely locked from outside and free from inside.



Retrofitable

Fits majority of doors with 54mm hole.



Secure Mode


Securely locked from both inside and outside. For when nobody is home.




Passage Mode

Free to enter from outside and free to exit from inside.

Nexion Vision - Double Cylinder

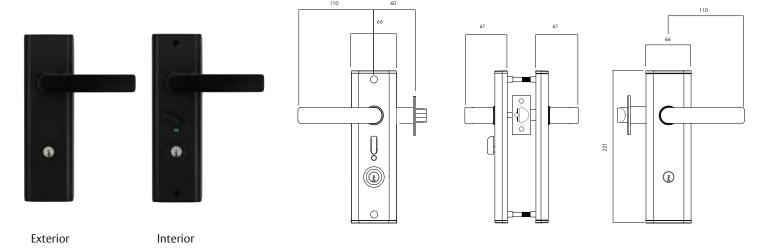


Ordering Procedure



		Options	
2		1	
Cylinders			
Double			2
Application Options			
Timber Frame	Str	ike*	1

Арр.

^{*} Metal Frame T-Strike optional (order part NX8/40SC)





Keying	
Keyed to Differ (Standard)	_
Keyed Alike 5 Pins	5KA
Project Keyed 5 Pins	5PK
Restricted Profile 5 Pins	5RP
Keyed Alike 6 Pins	6KA
Project Keyed 6 Pins	6PK

^{*} For Fire Rated Nexion Vision option (order part NXVFRKIT)



The Paradigm® 005 Double Cylinder Deadbolt is the premium security solution with its innovative safety features. The contemporary styling can be combined with any lever or entrance handle to create an elegant security solution, ideal for residential and architectural applications.

Key Features

- Three function modes with DualSelect® provides combination of convenience and security
- High security cut resistant stainless steel bolt
- Safety Release™ automatically unlocks internal knob upon key entry from outside
- LockAlert® indicator shows lock status at a glance
- Available in round or square rose


Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.




Product Details	
Backset	60 to 70mm adjustable stainless steel bolt
Bolt	High security, cut resistant stainless steel bolt
Cylinder	5 pin tumbler mechanism Brass cylinder and brass barrel
Door Thickness	32–48mm 32–36mm doors require a spacer (Included)
Finishes	Matt Black (MBK)
Keying	Supplied individually keyed with two keys per lock, 78,000 key combinations, Key blank KB2015P
Materials	High purity zinc alloy
Strike	Box strike with concealed crossgrain door frame strengthening screw


Standards and Compliance		
SL8	(Security) Australian Lock Standard (AS4145.2 - 2008)	
D8	(Durability) Australian Lock Standard (AS4145.2 - 2008)	
C6	(Corrosion) Australian Lock Standard AS4145.2 - 2008)	
K5	(Key Security) Australian Lock Standard AS4145.2 - 2008)	


Round Rose











Exterior

Interior

*32–36mm door thickness requires spacer ring (included)



Kinetic Defence®

Bump and pick resistant.



Counterbalance Bolt

Proportionally distributes the load between the door and door frame.



DualSelect®

Turn the key for safety mode. Turn the key further to select secure mode.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



SafetyRelease™

Minimises the risk of being locked in.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



LockAlert®

Interior Indicator shows lock status at a glance.



Safety Mode

Securely locked from outside and free from inside.



Secure Mode

Securely locked from both inside and outside. For when nobody is home.




Passage Mode


Free to enter from outside and free to exit from inside.


Square Rose











Exterior Interior

*32–36mm door thickness requires spacer ring (included)



Kinetic Defence® Bump and pick resistant.



Counterbalance Bolt

Proportionally distributes the load between the door and door frame.



DualSelect®

Turn the key for safety mode. Turn the key further to select secure mode.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



$\textbf{SafetyRelease}^{\scriptscriptstyle{\mathsf{TM}}}$

Minimises the risk of being locked in.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 32-48mm door thickness.



Anti-Corrosion

Successfully tested in accordance with AS2332.3.1:2001 neutral salt spray test.



LockAlert®

Interior Indicator shows lock status at a glance.



Safety Mode

Securely locked from outside and free from inside.



Secure Mode


Securely locked from both inside and outside. For when nobody is home.



Passage Mode

Free to enter from outside and free to exit from inside.

Ordering Procedure



DP	
Packaging	
Universal Pack DP	
Trade Pack	
Keying Options Special Keying-Residential	
Keyed Alike 5P	5KA
Keyed Alike 6P	6KA
Project Keyed 5P	5PK
Project Keyed 6P	6PK
Restricted Profile 5P	5RP
* For keving options ple	200

Packaging

Keying

Symmetry® Key in Lever



The Symmetry door handle range offers builders, developers, specifiers and interior designers a wide selection of product that can be used in any residential application

The Symmetry series is produced to meet the demanding quality and style requirements of the Australian market.

All products are tested in accordance with the security and durability requirements of the Australian Standards.

Along with the Lockwood 25 year Mechanical Warranty all Symmetry door furniture is supplied with a 5 year finish Guarantee with the exception of the Everbrass finish which has a 25 year finish Guarantee.

Keying

Standard Keying

- Supplied individually keyed with three keys per lock
- 78,000 key combinations
- Key blank KB2015P

Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control. Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Product Details		
Backset	60 to 70mm adjustable latch standard	
Cylinder	5 pin Lockwood C4 brass cylinder assembly (6 pin compatible)	
Functions	Entrance, privacy, passage and dummy available	
Handing	Suitable for left and right handed doors	
Installation	Easy to install with detailed mounting instructions	
Latch	13mm throw	
Strike	D-strike with anti-rattle tab as standard	

Symmetry 5 Year Finish Guarantee






Lockwood guarantees to replace Symmetry product if within five years from the proven date of purchase it tarnishes, discolours or corrodes when properly installed and subject to no more than fair wear and tear.



The exclusive one cylinder assembly solution 'OneCyl®' has been designed for the entire Lockwood Symmetry Range, which grants the convenience of cylinder interchangeability.



Symmetry® Key in Lever

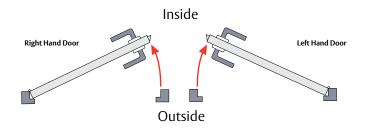




Symmetry® – Element™ Series


Part Numbers	Function
7550	Entrance
7551	Passage
7552	Privacy
7555	Dummy


Symmetry® – I	Element™ Leverset
Туре	Tubular Latch
Materials	Key in Lever: Zinc Alloy Chassis: Steel Bolt head: Zinc
Fixing	Horizontal mounting screw fixing
Door Thickness	35–45mm for timber doors
Finish	Matt Black
Packaging	Trade Pack and Display Pack available

Symmetry® Key in Lever

Ordering Procedure







Packaging	
Packaging	
Display Pack	DP
Trade Pack	TP

Keying		
KA		
Keying		
Special Keying-Residential Keyed Alike 5P 5KA		
Keyed Alike 6P	6KA	
Project Keyed 5P	5PK	
Projected Keyed 6P	6PK	
Restricted Profile 5P	5RP	

001 Double Cylinder Deadlatch

The Australian-designed Lockwood 001® Deadlatch offers market-leading performance and reliability for your home.

The 001® Deadlatch features a cut-resistant stainless steel bolt, 11 concealed anchorage points and a door frame strengthener that combine to offer high security protection.

Additional features include a bolt holdback function that allows you to use your door in passage mode.

Features and Specifications

- Bolt holdback function activated by external key or internal knob
- Can be key locked in holdback position by key from inside
- Can be keyed alike to other Lockwood door locks
- · Available in display pack

Keying

- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB2015P

Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Retrofitable

Replace your existing 001 Deadlatch.



Product Details		
Backset	60mm	
Case	High purity zinc alloy	
Cylinders	Internal and external 5 pin tumbler mechanism. Brass cylinders and brass barrels.	
Door Thickness	30 - 45mm	
Finish	Matt Black (MBK)	
Latch	Stainless steel 18mm projection	
Packers	3mm thick packer plates are available, these packers are installed under lock body to align lock body with face of jamb	


Standards and Compliance

Conforms to Australian Standard (AS4145.2-2008 S_L7D8C6)

001 Double Cylinder Deadlatch

Double Cylinder with Knob



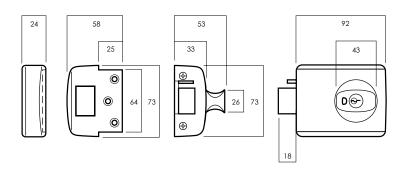

Exterior Cylinder

Interior



Kinetic Defence® Bump and pick resistant.



2 Keys Included Can be keyed alike to other Lockwood door locks.



SafetyRelease™ Minimises the risk of being locked in.



Retrofitable Replace your existing 001 Deadlatch.




LockAlert® Interior Indicator shows lock status at a glance.



Safety Mode Securely locked from outside and free from inside.



Secure Mode





Passage Mode Free to enter from outside and free to exit from inside.




Deadlatch Bolt Stainless steel 18mm projection.

001 Double Cylinder Deadlatch

001 - Knob with Open In Strike - Single Pack	
Part Number	Finish
001-1K1MBKDP	Matt Black
001-1K1MBK	Matt Black

 $\label{thm:continuous} \mbox{Suitable for INWARD opening timber framed doors.}$



Symmetry® 7107 Double Cylinder Deadbolt





The Symmetry general purpose Deadbolts are standard security products that should be fitted with a Key in Knob or Key in Lever lockset for added safety and security.

Keying


- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB2015P

Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.


Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.

Bolt Dimensions



Retrofitable


Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45mm door thickness.





Product Details		
Backset	60mm to 70mm adjustable bolt	
Bolt	Solid brass bolt with 25mm projection. Hardened insert in locking bolt	
Cylinder	The one cylinder assembly solution "OneCyl®" has been designed for the Lockwood Symmetry Range, which grants the convenience of cylinder interchangeability. C4 brass cylinder assembly (6 pin compatible)	

Symmetry® 7107 Double Cylinder Deadbolt

Double Cylinder

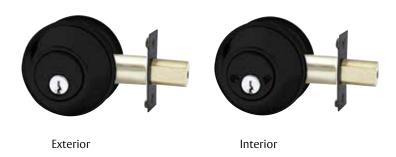







Kinetic Defence®
Bump and pick resistant.



2 Keys Included

Can be keyed alike to other Lockwood door locks.



Retrofitable

Replace your existing Deadbolt. Fits 54mm hole. 60-70mm adjustable backset. 31-45mm door thickness.

ONECYL® Cylinder Solution

Part Number	Finish
7107MBKDP	Matt Black
7107MBK	Matt Black

Prod	L	7-4-1	1

Door Thickness	31mm to 45mm *31 to 41mm requires spacer ring (included)
Finish	Matt Black (MBK)
Handing	Suits left or right hand opening doors
Keying	Operated by key from both inside and outside

100 Nightlatch



General purpose nightlatch.

Features and Specifications

- Opened by key from outside and by turn knob inside
- Bolt may be held back by turning knob in clockwise direction

Keying

- Supplied individually keyed with two keys per lock
- 78,000 key combinations
- Key blank KB2015P

Restricted Special Keying

Lockwood locks can be keyed to a number of controlled and/or specially keyed systems. These range from legally protected keys to protect against unauthorised duplication, which can also include specially designed key systems such as master key systems, which allow for different levels of mechanical access control.

Please refer to Lockwood Keying Catalogue or contact your local sales office or customer service for specific information.


Product Details		
Backset	60mm	
Case	High purity zinc alloy. 92mm wide, 64mm high, 43mm projection	
Cylinder	5 pin tumbler mechanism Brass cylinder and brass barrel	
Door Thickness	28 – 45mm	
Latch	Brass. Reversible. 13mm projection	
Finish	Lock Body : Matt Black (MBK) External Cylinder: Chrome Plate (CP)	

100 Nightlatch

100







Exterior Cylinder

Interior

100 Nightlatch with Open In Strike

Finish	Display Pack
Chrome Plate Cylinder	100MBKDP



Lockwood is the leading brand in the Australian locking industry. With an established reputation for high quality products, this iconic brand provides a wide range of locking solutions to residential housing, commercial, semi-commercial, building and industrial application markets. Lockwood is supported by an extensive distribution and after-sales support network. Our customers include retailers, architects, trade and industrial personnel, locksmiths and security dealers.

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience.

ASSA ABLOY is represented in all major regions, in both mature and emerging markets, with leading positions in Australia, Europe and North America.



The Lockwood 25 Year Mechanical Warranty

Our belief that we manufacture the finest premium products available in today's market place is backed by the Lockwood 25 Year Mechanical Warranty, ensuring that Lockwood continues to keep Australians safe by delivering security and peace of mind.

For warranty terms and conditions, please visit www.lockweb.com.au or call 1300WARRANTY

ASSA ABLOY Opening Solutions Australia 235 Huntingdale Road Oakleigh, Victoria, 3166 Australia

1300 LOCK UP (1300 562 587) lockweb.com.au

ASSA ABLOY New Zealand Ltd 6 Armstrong Road Albany, Auckland, 0632 New Zealand

info.nz@assaabloy.com Telephone +64 9415 7111 assaabloy.co.nz

